



10 / 506850
4/303/000786



INVESTOR IN PEOPLE

03 SEP 2004

The Patent Office
Concept House
Cardiff Road
Newport

South Wales
NP10 8QQ
REC'D 03 APR 2003

WIPO PCT

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated 26 March 2003



07HAR02 E701326-1/010121
P01/7700.000-0205290.0

1/77

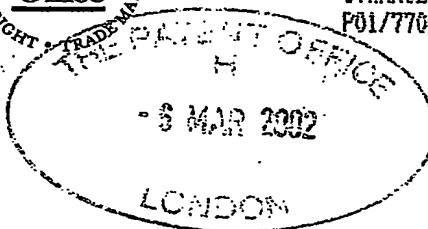

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

P16167

2. Patent application number

(The Patent Office will fill in this part)

0205290.0

3. Full name, address and postcode of the or of each applicant (underline all surnames)

MATCON (R & D) LIMITED
MATCON HOUSE
LONDON ROAD
MORETON-IN-MARSH
GLOUCESTERSHIRE GL56 0HJ

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

6785000001

4. Title of the invention

APPARATUS FOR HANDLING FLOWABLE MATERIAL

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Edward Evans Barker
Clifford's Inn
Fetter Lane
London EC4A 1BZ

Patents ADP number (if you know it)

8199895001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:


- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

YES



07HAR02 E704326-1/010121
P01/7700-0000-0205290.0

1/77

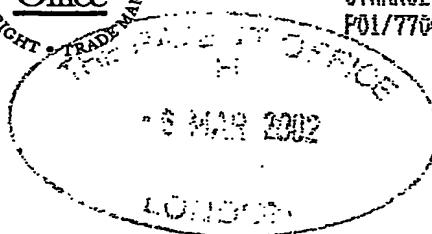

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

P16167

2. Patent application number

(The Patent Office will fill in this part)

0205290.0

3. Full name, address and postcode of the or of each applicant (underline all surnames)

MATCON (R & D) LIMITED
MATCON HOUSE
LONDON ROAD
MORETON-IN-MARSH
GLOUCESTERSHIRE GL56 0HJ

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

6785000001

4. Title of the invention

APPARATUS FOR HANDLING FLOWABLE MATERIAL

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Edward Evans Barker
Clifford's Inn
Fetter Lane
London EC4A 1BZ

Patents ADP number (if you know it)

8199895001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

APPARATUS FOR HANDLING FLOWABLE MATERIAL

The invention relates to apparatus for handling flowable material, particularly dry flowable material such as tablets.

It is often necessary to transfer tablets, for example in the pharmaceutical industry, from one station to another, particularly between stations at different levels.

In the past, gravity feed or pneumatic feed causes the tablets, which are often frangible, to become crushed or broken, which whilst leading to a loss of often expensive product, also can contaminate ambient atmosphere.

It is an object of the invention to seek to mitigate these disadvantages.

According to the invention there is provided apparatus for transforming flowable particulate material from one station to another, comprising a carrier for the material, and means externally of the carrier for moving the carrier between stations, the arrangement being such that the carrier and the means are not connected mechanically for movement of the carrier.

Suitably, the carrier may comprise magnetic properties and the external movement means may comprise a magnet.

The carrier may be mounted in a housing, such as a tubular housing externally of which the moving means is mounted.

Apparatus embodying the invention is hereinafter described, by way of example, with reference to the accompanying drawings.

Fig. 1 shows a schematic side elevation of apparatus according to the invention;

Fig. 1A shows an elevational view of a part of the apparatus of Fig. 1; and

Fig. 1B shows a schematic plan view of a further part of the apparatus.

Referring to the drawings, there is shown apparatus 1 for transferring flowable particulate material such as dry tablets (not shown) for example pharmaceutical tablets, from one station 2 to another 3. The apparatus 1 comprises a carrier 4 for the tablets, and means 5 externally of the carrier 4 for moving the carrier 4 between stations 2 and 3, the arrangement being such that the carrier 4 and the means 5 are not connected mechanically for movement of the carrier 4.

The apparatus 1 is shown mounted to transfer the tablets from an upper station 2 to a lower station 3, though it will be understood that a reverse transfer may be carried out. The carrier 4 for the tablets has magnetic properties, for example by having a body made of a metal with magnetic properties, or by the body 6 being made of a non-magnetic material such as a plastic, with an insert 7 with magnetic properties. The carrier 4 is mounted for movement in a non-magnetic housing such as a tube 8, which has an entry port or funnel 9 at the upper station 2 by which the carrier may be topped up, and an outlet nozzle 10 at the lower station 3. The means 5 for moving the carrier 4 along the tube 8 comprises in the embodiment a magnet 11 which is externally positioned with respect to the carrier 4 and the tube 8 so that when moved in the direction of the length of the tube 8, the carrier 4 is moved along the tube, thereby gently to transfer the carrier 4, and tablets therein, between the upper and lower stations 2 and 3. The carrier 4 and tablets are moved gently as there is no mechanical connection between the magnet 11 forming the moving means 5 and the carrier 4. The magnet 11 moving means may be mounted along the tube by any suitable means, for example by motor, a screw, or other means, and the magnet may

have a shape which fits round the external body 8 of the tube, which acts as a guide therefor, Fig. 1B.

There may be a sensor 12 to monitor and/or control tablet flow, and a stop 13 to provide for optimum positioning of the carrier 4 for tablet release through the nozzle 10 at the station 2.

Apparatus 1 as shown in the drawings may have the following feature:-

A device for raising or lowering components, particulates, tablets or other dry, flowable material (the product) from one level to another.

The product is transferred by a (possibly metal or plastic with metal insert) carrier, which travels inside a hollow tube, which runs from the point of product entry to product exit.

Suitable product entry and product exit ports are provided on the tube.

The carrier is constructed from a metal with magnetic properties or a plastic with such a metal insert.

The materials of construction of the tube allow an externally mounted magnet to act through the wall of the tube and hold the carrier in place.

The carrier is free of any mechanical connections. It is held in place exclusively by the external magnet.

By moving the position of the magnet along the external wall of the tube, the carrier is also moved up and down inside the tube as required.

The tube may be installed vertically or inclined as necessary to suit the facility design.

The exact position and speed of movement of the magnet/carrier is fully controllable to ensure gentle handling of the product.

The position of product within the tube can be directly determined by external sensors, which also act through the wall of the tube.

The internal (product contact surfaces and the carrier) can be fully cleaned in place automatically with liquid, for which there is a drain 14.

There may be a handle 15 of the carrier 4 for ease of removal from the tube, as by "twist and pull".

